

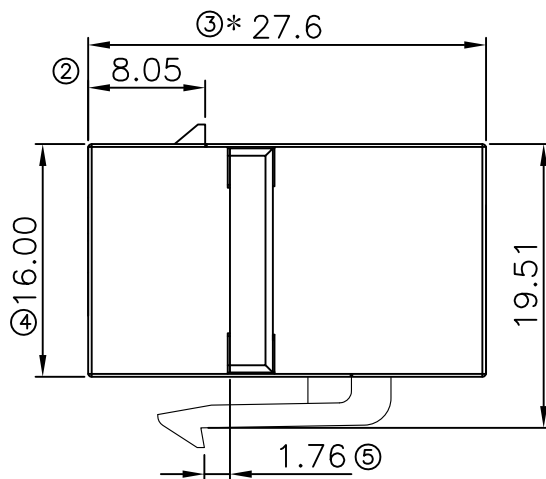


RoHS compliant

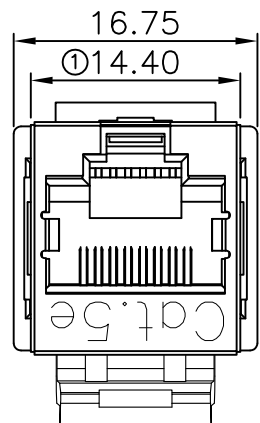

MATERIALS:

- 1.SHIELDED:STAINLESS STEEL.
- 2.PLASTIC HOUSING:ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V-0.
- 3.CONTACTS:THICKNESS PHOSPHOR BRONZE
- 4.PLATING:GOLD PLATING OVER NICKEL IN CONTACT

ELECTRICAL:

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.


MECHANICAL:

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.


ENVIRONMENTAL:

- 1.STORAGE : -40°C~+85°C.
- 2.OPERATION : -20°C~+70°C.

Mates With Modular Plug Conforming TO FCC Part 68.Subpart F.



Front Panel Jack Only Clearance
W/O Latch Feature

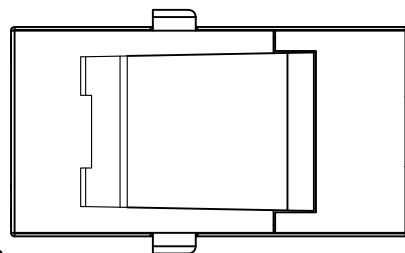

Single Panel-Latch Clearance
Panel Thickness 1.60mm

P/N:

- 6u" P/N 5001-ZTH030-001S
15u" P/N 5001-ZTH030-002S
30u" P/N 5001-ZTH030-003S
50u" P/N 5001-ZTH030-004S

				GENERAL TOLERANCE		DRAWN		Gene Li		2019/07/11		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
				. X	±0.35	X. °	± 2°	CHECKED		JCB							
				. XX	±0.25	X. °	± 1°	APPROVE				PART NO.		5001-ZTH030-001S			
A0		NEW DESIGN	2019/07/11	. XXX	±0.15	. XX. °	± 0.5°					TITLE:		MODULAR COUPLER JACK (8P8C SHIELDED) CAT. 5E			
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		UNIT		mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	5001-H030