
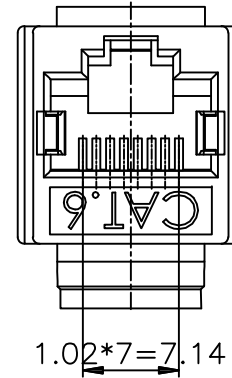
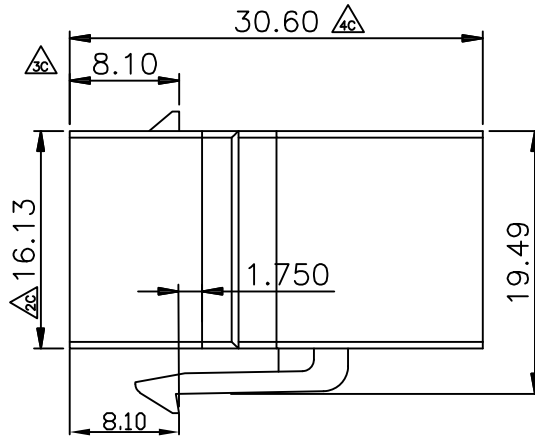


RoHS compliant

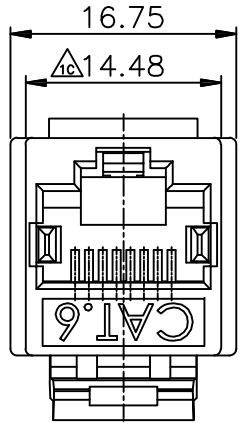

MATERIALS:

- 1.SHIELDED:STAINLESS STEEL.
- 2.PLASTIC HOUSING:ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V-0.
- 3.CONTACTS:THICKNESS PHOSPHOR BRONZE
- 4.PLATING:GOLD PLATING OVER NICKEL IN CONTACT

ELECTRICAL:

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.


MECHANICAL:

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.


ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -20℃~+70℃.


Mates With Modular Plug Conforming TO FCC Part 68.Subpart F.



Front Panel Jack Only Clearance
W/O Latch Feature

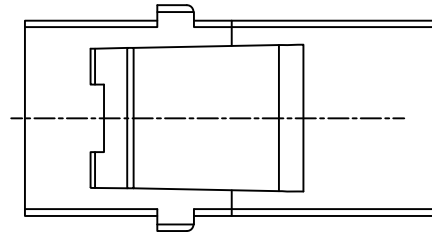

Single Panel-Latch Clearance
Panel Thickness 1.60mm



P/N:

- 6u" P/N 5001-ZTS030-016S
15u" P/N 5001-ZTS030-017S
30u" P/N 5001-ZTS030-018S
50u" P/N 5001-ZTS030-019S

					GENERAL TOLERANCE		DRAWN	Gene Li	2017/03/21	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD				
					.X ±0.35	X.° ± 2°	CHECKE	JH						
					.XX ±0.25	.X° ± 1°	APPROVE			PART NO. 5001-ZTS030-019S				
					.XXX ±0.15	.XX° ± 0.5°				TITLE: MODULAR COUPLER JACK (8P8C SHIELDED) CAT. 6				
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		UNIT	mm	SCALE	1:1	SHEET	REV	A0	DRAWING NO. 5001-S030