

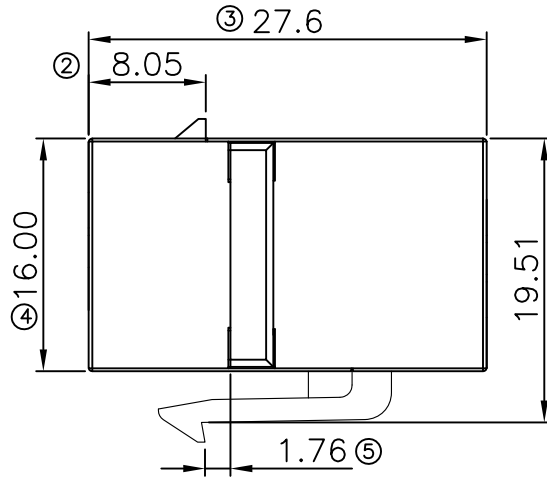


RoHS compliant

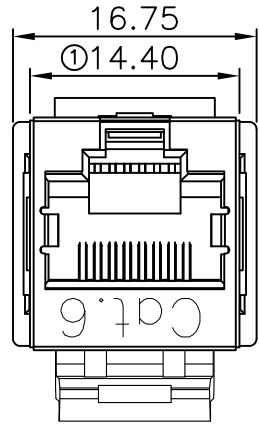

MATERIALS:

- 1.SHIELDED:STAINLESS STEEL.
- 2.PLASTIC HOUSING:ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V-0.
- 3.CONTACTS:THICKNESS PHOSPHOR BRONZE
- 4.PLATING:GOLD PLATING OVER NICKEL IN CONTACT

ELECTRICAL:


- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:



- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
 - 2.OPERATION : -20℃~+70℃.
- Mates With Modular Plug Conforming TO FCC Part 68.Subpart F.



Front Panel Jack Only Clearance
W/O Latch Feature

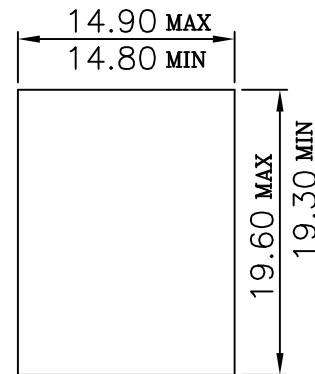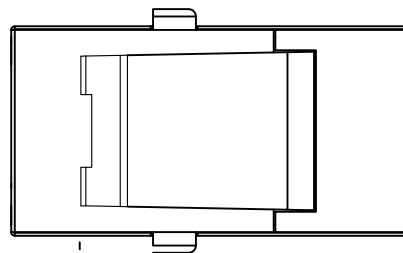

Single Panel-Latch Clearance
Panel Thickness 1.60mm

P/N:

- 6u" P/N 5001-ZTH020-001S
15u" P/N 5001-ZTH020-002S
30u" P/N 5001-ZTH020-003S
50u" P/N 5001-ZTH020-004S

					GENERAL TOLERANCE	DRAWN	Gene Li		2019/07/11		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD								
					. X ±0.35 X. ° ± 2°	CHECKE	JCB				PART NO.		5001-ZTH020-001S						
A0		NEW DESIGN		2019/07/11	. XX ±0.25 X. ° ± 1°	APPROVE					TITLE:		MODULAR COUPLER JACK (8P8C SHIELDED) CAT. 6						
					. XXX ±0.15 X. XX° ± 0.5						DRAWING NO.		5001-H020						
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT		UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.		5001-H020	
																			