

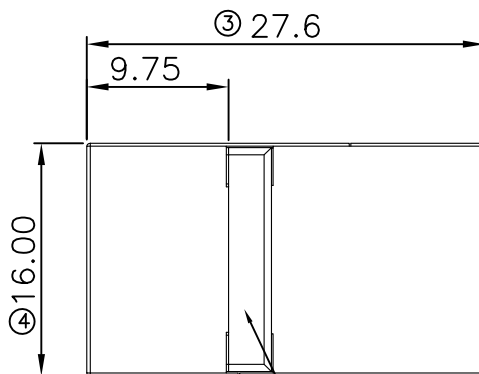


RoHS compliant

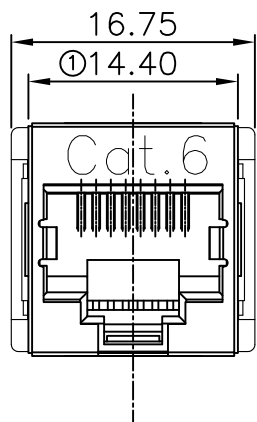

MATERIALS:

- 1.SHIELDED:STAINLESS STEEL.
- 2.PLASTIC HOUSING:ENGINEERING THERMOPLASTIC
FLAMMBILITY RATING UL94V-0.
- 3.CONTACTS:THICKNESS PHOSPHOR BRONZE
- 4.PLATING:GOLD PLATING OVER NICKEL IN CONTACT

ELECTRICAL:

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:


- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:



- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -20℃~+70℃.

Mates With Modular Plug Conforming TO FCC Part 68.Subpart F.

无缺口



Front Panel Jack Only Clearance
W/O Latch Feature

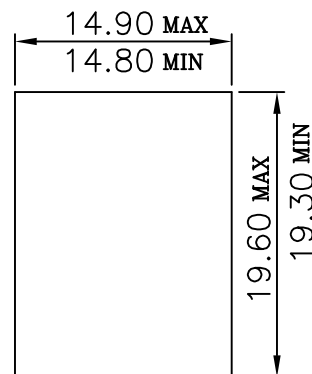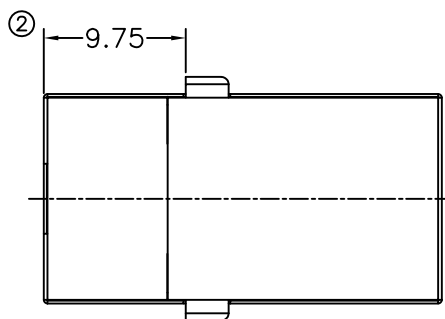

Single Panel-Latch Clearance
Panel Thickness 1.60mm

P/N:

6u" P/N 5001-ZTH021-001S
15u" P/N 5001-ZTH021-002S
30u" P/N 5001-ZTH021-003S
50u" P/N 5001-ZTH021-004S

					GENERAL TOLERANCE		DRAWN		Gene Li		2019/07/11		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
					. X	±0.35	X. °	± 2°	CHECKED				PART NO.		5001-ZTH021-001S			
A0		NEW DESIGN	2019/07/11		. XX	±0.25	. X°	± 1°	APPROVE				TITLE:		MODULAR COUPLER JACK (8P8C SHIELDED) CAT. 6			
					. XXX	±0.15	. XX°	± 0.5°										
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT				UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	5001-H021