


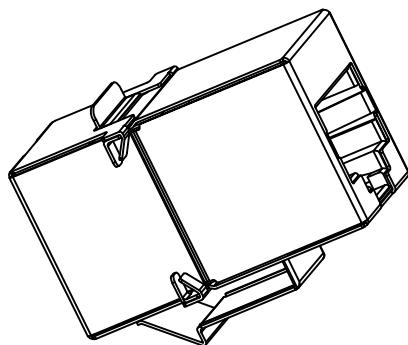

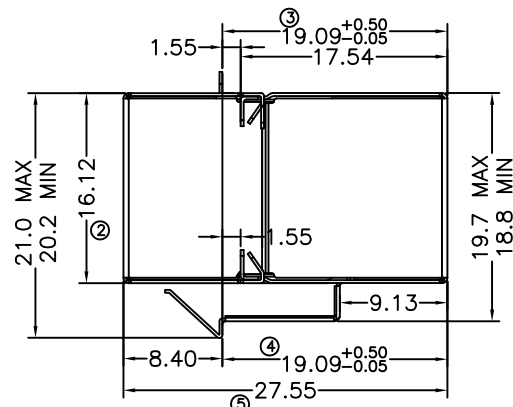


RoHS compliant

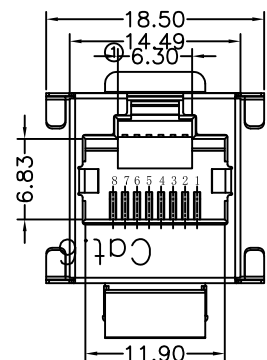

MATERIALS:

- 1.SHIELDED:STAINLESS STEEL.
- 2,PLASTIC HOUSING:ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V-0.
- 3,CONTACTS:THICKNESS PHOSPHOR BRONZE
- 4,PLATING:GOLD PLATING OVER NICKEL IN CONTACT

ELECTRICAL:

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.



ENVIRONMENTAL:

- 1.STORAGE : -40°C~+85°C.
- 2.OPERATION : -20°C~+70°C.


Mates With Modular Plug Conforming TO FCC Part 68.Subpart F.

P/N:

- 6u" P/N 5001-ZTH227-001S
15u" P/N 5001-ZTH227-002S
30u" P/N 5001-ZTH227-003S
50u" P/N 5001-ZTH227-004S

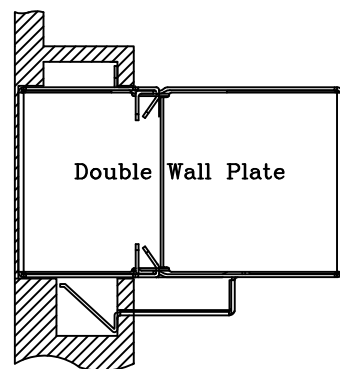

Front Panel Jack Only Clearance
W/O Latch Feature

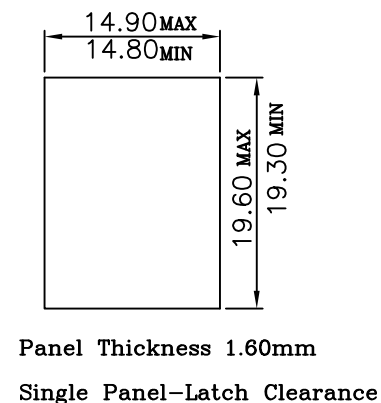

Panel Thickness 1.60mm

Single Panel-Latch Clearance

				GENERAL TOLERANCE		DRAWN		Gene Li		2019/07/11		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
				. X ±0.35 X. ° ± 2°		CHECKE		HC								PART NO.	
A0		NEW DESIGN		2019/07/11		. XX ±0.25 . X° ± 1°		APPROVE				TITLE:		MODULAR COUPLER JACK (8P8C SHIELDED) CAT. 6			
						. XXX ±0.15 . XX° ± 0.5°											
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT		UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	5001-H227
																	