

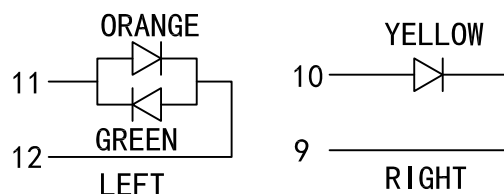
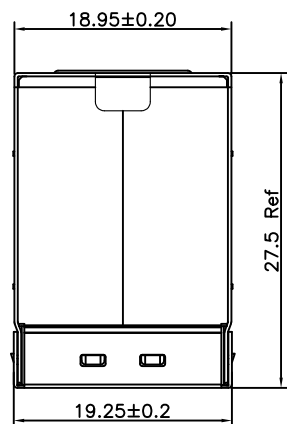
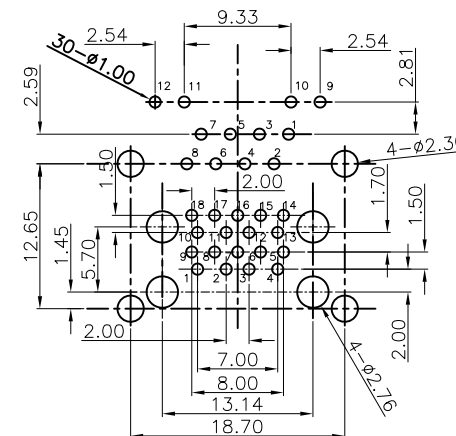
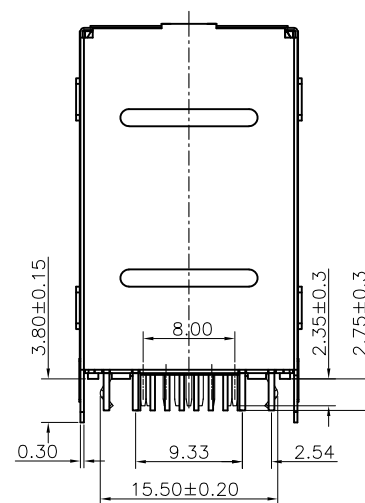


RoHS compliant

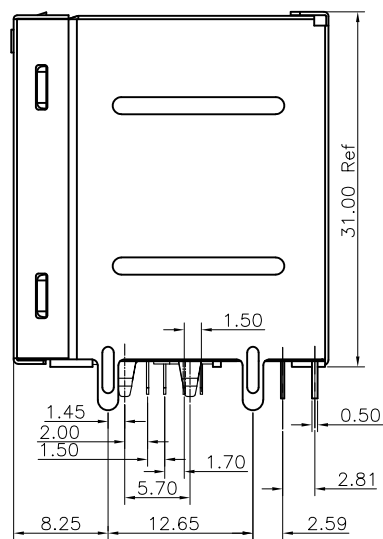

Housing:PBT Black.
Contact:Copper Alloy
Shell:SPCC
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000M Ω Min.
Contact Resistance:30 m Ω Max.
Dielectric Withstanding Voltage:500V AC
Temperature Range:-55 $^{\circ}$ C to +85 $^{\circ}$ C

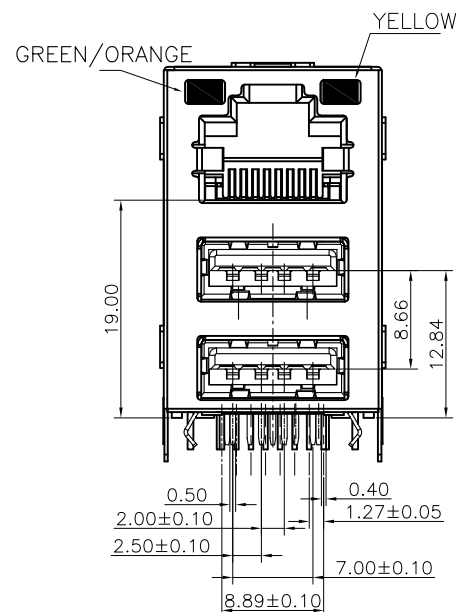

RECOMMENDED P.C.B. PATTERN LAYOUT
=====

					GENERAL TOLERANCE			DRAWN		Gene Li		2016-03-12		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LT									
					.X	±0.35	X.°	± 2°	CHECKE		YCL				PART NO.		RJUSB-882G-B21211X						
					.XX	±0.25	X.°	± 1°															
A0		NEW DESIGN		2016/03/12		.XXX	±0.15	.XX°	± 0.5°	APPROVE						TITLE:		RJ45+DOUBLE USB 3.0 AF W/LED JACK					
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT					UNIT	mm	SCALE	1:1	SHEET		REV	A0	DRAWING NO.				