
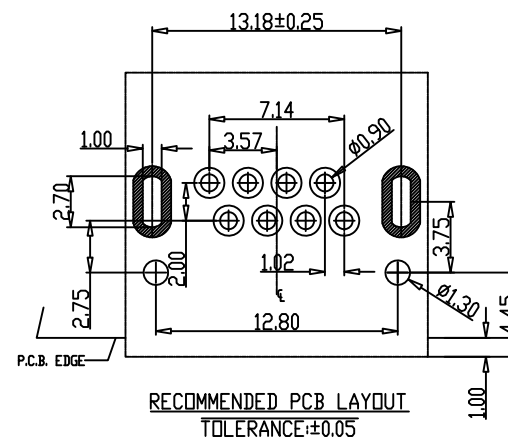
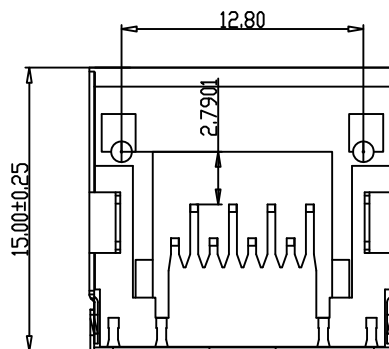

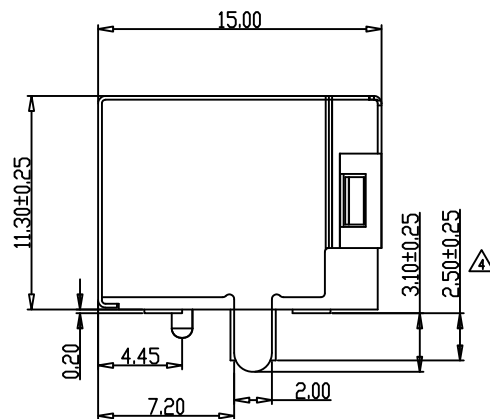


RoHS compliant

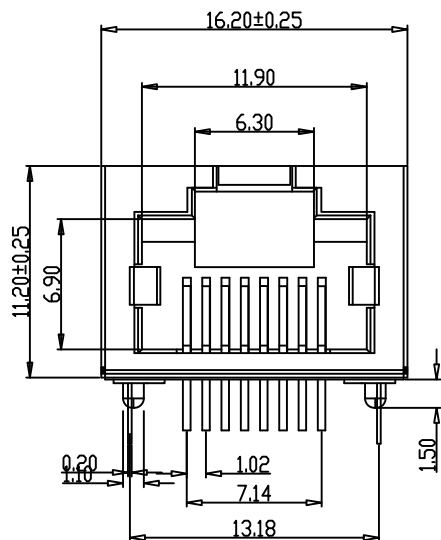

NOTES

MATERIAL

1. HOUSING MATERIAL : PBT/LCP/PA46 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
: FU", 3U", 6U", 15U", 30U", 50U".
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY
WITH NICKEL PLATED.

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC.
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C.
2. OPERATION : -40°C~+85°C.

GENERAL TOLERANCE

.X	±0.35	X.°	±2°
.XX	±0.25	.X°	±1°
.XXX	±0.15	.XX°	±0.5°

PROJECT



DRAWN

Gene Li

2016/07/11

CHECKE

APPROVE

UNIT: mm SCALE: 1:1 SHEET: 1/1 REV: A0

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

PART NO. RJ5JE-8811-1201111

TITLE: 5JE 8P8C W/SHIELD W/O LED, F=3.1MM

A0

REV

ECN NO

NEW DESIGN

DESCRIPTION

2016/07/11

DATE

SIGNATURE