
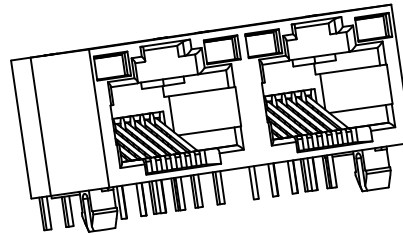
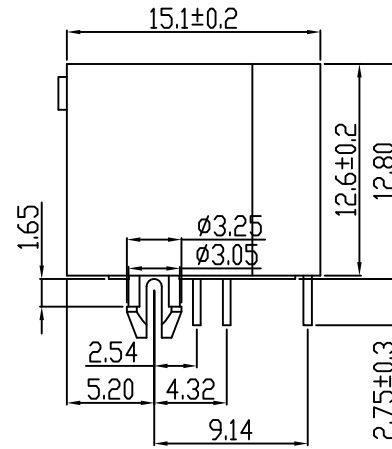
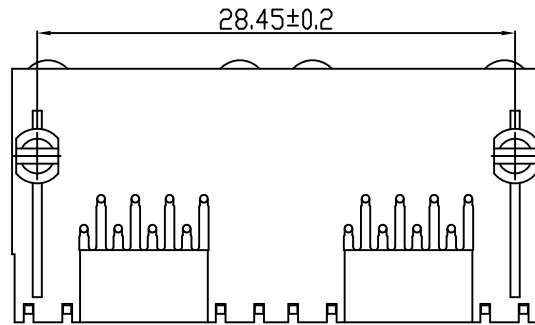


RoHS compliant

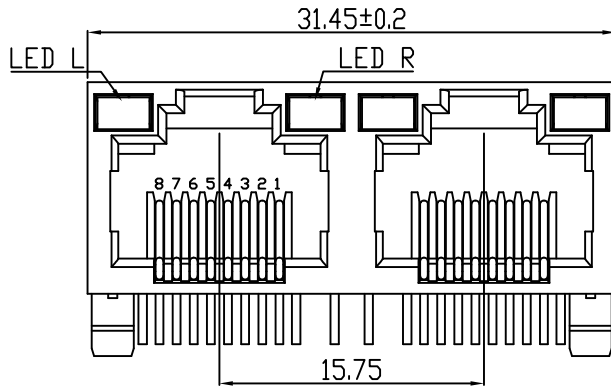

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.


MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: Ø0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE: 20N Max.
4. RETENTION STRENGTH: 50N pendant 60±5s.
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
2. OPERATION: -40°C ~ +85°C.

LED L YELLOW



LED R GREEN




P/N:RJ5JA-8812-001111R

5JA RJ45 SERIES PCB JACK
POSITIONS (金針位置):
8-POSITIONS (8P)
CONTACTS (金針根數):
8-CONTACTS (8C)
PORTS (窗口):
14-TX
SHIELD (屏蔽壳):
0-Without SHIELD (全塑)
BACK PEG (定位柱):
0-Without BACK PEG (无定位脚)
LED STYLE (LED 顏色类型):
1-LED LEFT:YELLOW, LED RIGHT:GREEN (左黄右绿)
2-LED LEFT:GREEN, LED RIGHT:YELLOW (左绿右黄)

PIN STYLE (PIN 规格):
R-ROUND PIN (圆针)
P-PLAT PIN (扁针)
COLOR (颜色):
1-BLACK (黑色)
4-YELLOW (黄色)
PLASTIC (塑料):
1-PBT
GOLD PLATING (鍍金厚度):
1-10U"; 2-1.50U"; 3-30U"; 4-60U";
5-150U"; 6-300U"; 7-500U";

PC Board Layout

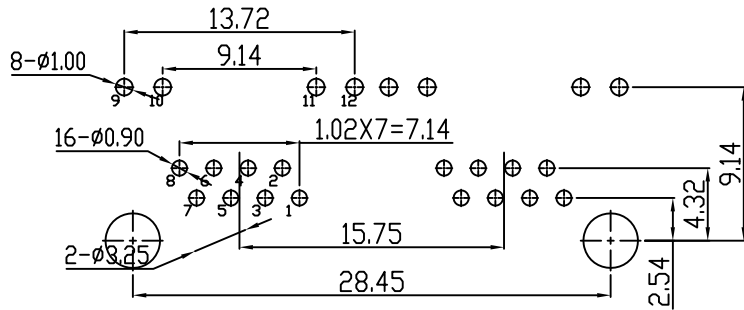

					GENERAL TOLERANCE			DRAWN		Gene Li		2016/12/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD						
						.X	±0.35	X.°	± 2°	CHECKE		PB			PART NO. RJ5JA-8812-0001111R					
A0		NEW DESIGN		2016/12/08		.XX	±0.25	.X°	± 1°	APPROVE					TITLE: 5JA RJ45 1X2 8P8C W/LED JACK					
						.XXX	±0.15	.XX°	± 0.5°											
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT				UNIT		mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	5JA-8812