

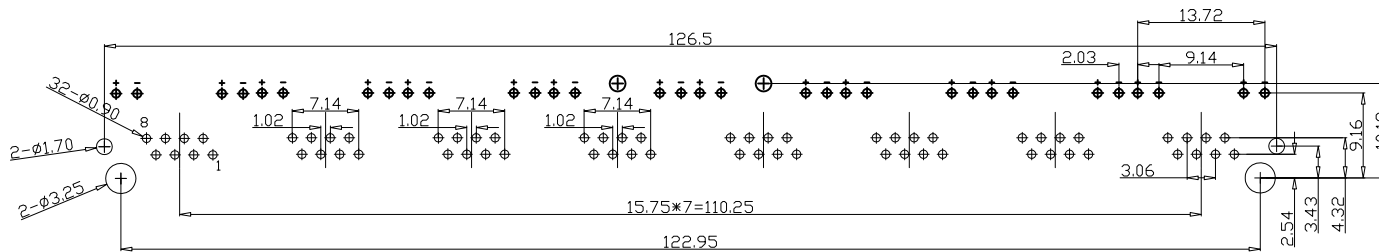
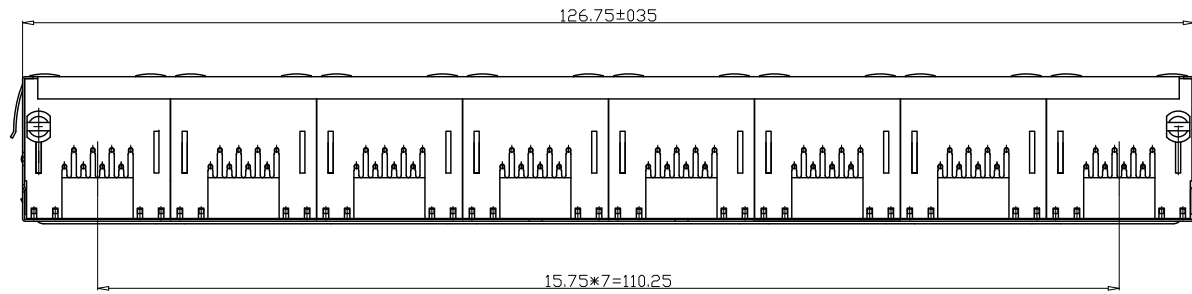


RoHS compliant

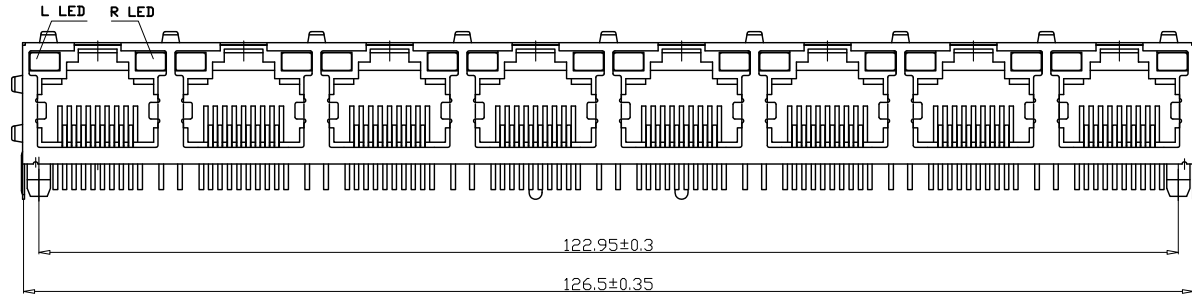

PC Board Layout



NOTES

- MATERIAL
1. HOUSING MATERIAL
 2. CONTACT MATERIAL
 3. PLATING
 4. SHIELD

: PBT, UL94V-0.
: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
: GOLD PLATING OVER NICKEL.
: FU", 3U", 6U", 15U", 30", 50".
: 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

1. VOLTAGE RATING
2. CURRENT RATING
3. CONTACT RESISTANCE
4. INSULATION RESISTANCE
5. DIELECTRIC RESISTANCE

: 125 VAC RMS.
: 1.5 AMP.
: 30 MILLIOHMS MAX.
: 500 MEGOHMS MIN @ 500V DC .
: 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY
2. PCB RETENTIONPRE-SOLDER


: 750 CYCLES MIN.
: 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE
2. OPERATION

: -40°C ~ +85°C.
: -40°C ~ +85°C.

P/N:RJ5JA-8818-221111R

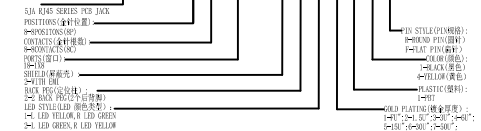

A						GENERAL TOLERANCE		DRAWN		Gene Li		2016/04/10		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD				A		
						.X	±0.35	X.°	± 2°	CHECKE		JF								
						.XX	±0.25	.X°	± 1°	APPROVE										
	A0		NEW DESIGN	2016/04/10		.XXX	±0.15	.XX°	± 0.5°	PROJECT				PART NO.		RJ5JA-8818-221111R				
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT				UNIT:	mm	SCALE:	1:1	SHEET:	1/1	REV:	A0	TITLE:		5JA RJ45 1X8 8P8C W/EMI, LED YELLOW/GREEN	