
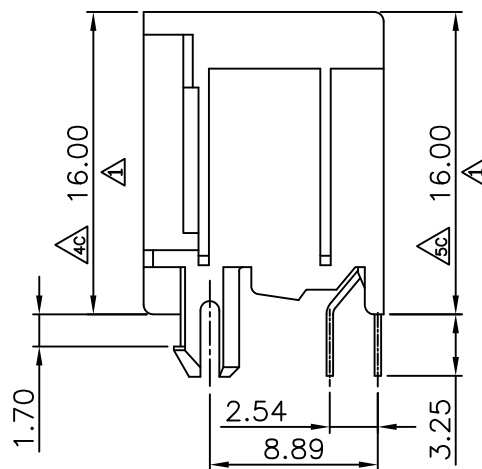


RoHS compliant

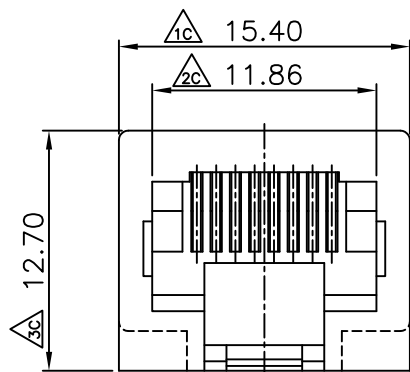

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.

Electrical:




- 1.Voltage Rating:125 Vac Rms.
- 2.Current Rating:1.5 Amp.
- 3.Contact Resistance:40 Milliohms Max.
- 4.Insulation Resistance:1000 Megohms Min @500 Vdc
- 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

- 1.Operating:750 Cycles Min.

Environmental:

- 1.Storage:-40°C To +85°C.
- 2.0perton:-20°C To +75°C.

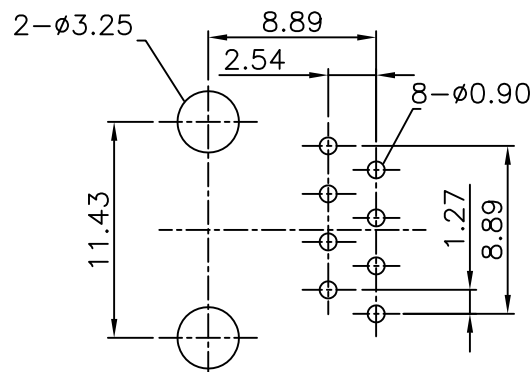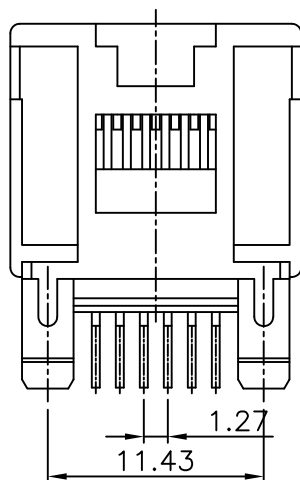

P/N: RJ52G-8811-002XXXX

GOLD PLATING
5-6u

PLASTIC
1-PBT
2-NYLON66
3-NYLON46

COLOR
1-BLACK
7-BLUE

NOTE
X-No Note

						GENERAL TOLERANCE		DRAWN		Gene Li		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD		
						.X	±0.35	X.°	± 2°	CHECKE				PART NO. RJ52G-8811-002XXXX
						.XX	±0.25	.X°	± 1°	APPROVE				
A0		NEW DESIGN				.XXX	±0.15	.XX°	± 0.5°					
REV	ECN NO	DESCRIPTION			DATE	SIGNATURE	PROJECT		UNIT: mm		SCALE: 1:1	SHEET: 1/1	REV: A0	TITLE: RJ45 8P8C TOP ENTRY PCB JACK (52G 8P8C)