

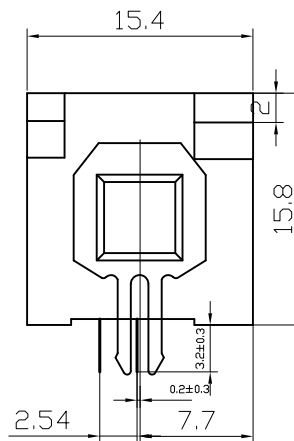


RoHS compliant

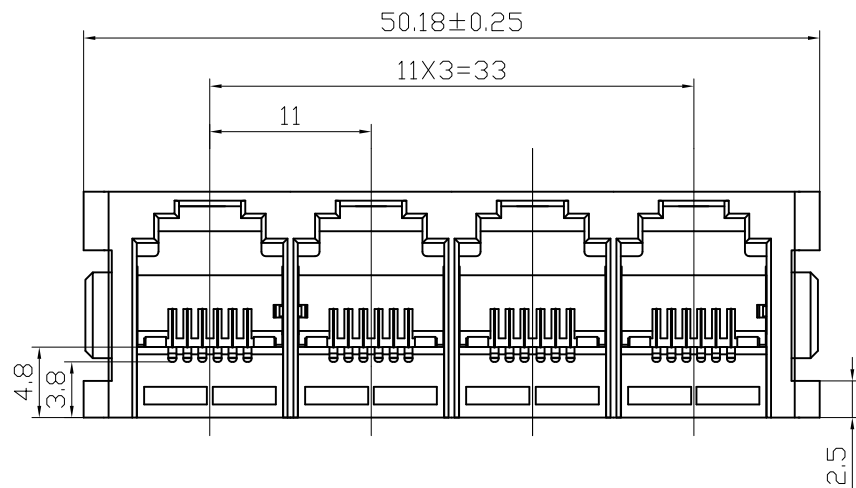


NOTES:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
 2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.45\text{mm}$.
 3. PLATING: GOLD PLATING $\text{Fu} \sim 50\text{u}''$ OVER NICKEL.
- ELECTRICAL:
1. VOLTAGE RATING: 125 VAC RMS.
 2. CURRENT RATING: 1.5 AMP.
 3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC.
 5. DIELECTRIC WITHSTANDING RESISTANCE: 1000VAC RMS 60Hz 1MIN.
- MECHANICAL:
1. DURABILITY: 750 CYCLES MIN.
 2. PCB RETENTION PRE-SOLDER
- ENVIRONMENTAL:
1. STORAGE: -40°C TO $+85^{\circ}\text{C}$.
 2. OPERATION: 0°C TO 70°C .

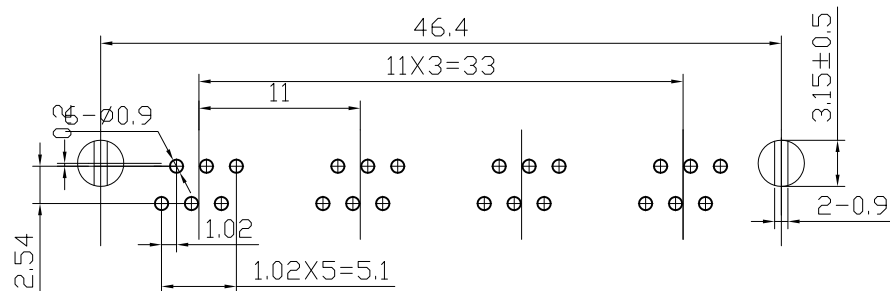

PC Board Layout
Component Side Shown

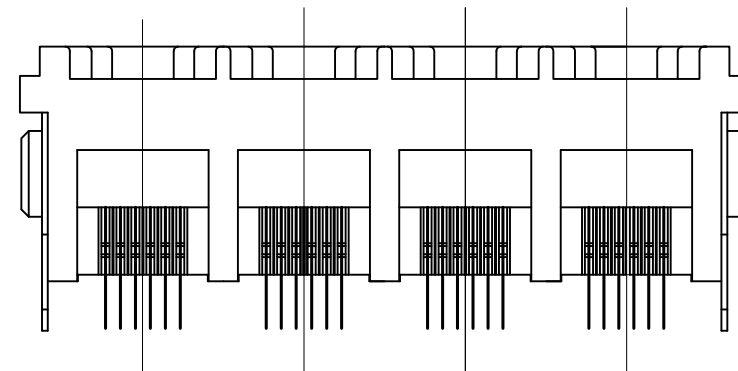

					GENERAL TOLERANCE		DRAWN		Gene Li		2019/12/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD									
		变更图框	2019/12/08		.X	±0.35	X.°	± 2°	CHECKE				PART NO.		RJ52B-6614-121111X							
A0		NEW DESIGN	2017/06/08		.XX	±0.25	.X°	± 1°	APPROVE				TITLE:		5225 1X4 6P6C 180° 带铁脚 一体式							
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT				UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.		RJ52B-66			
																						