
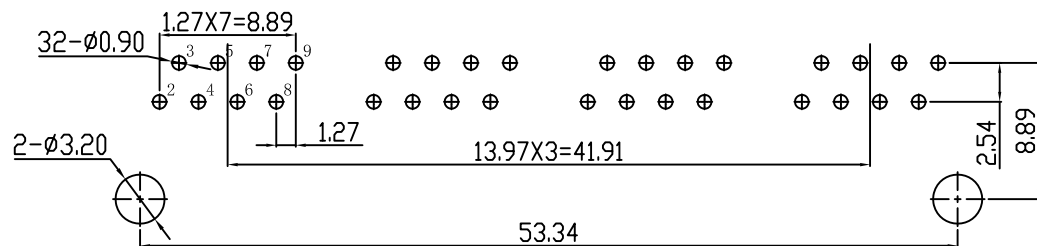
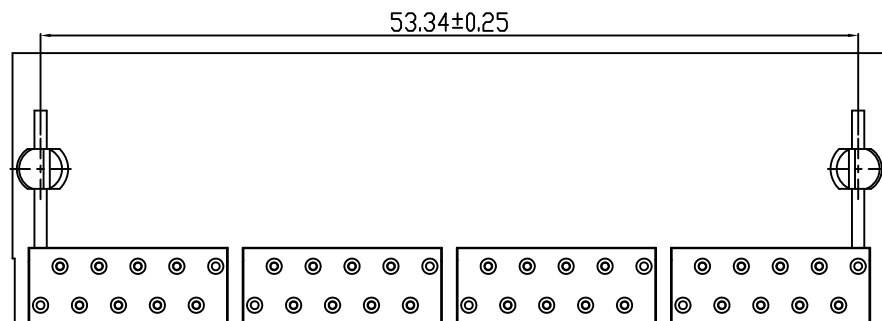


RoHS compliant

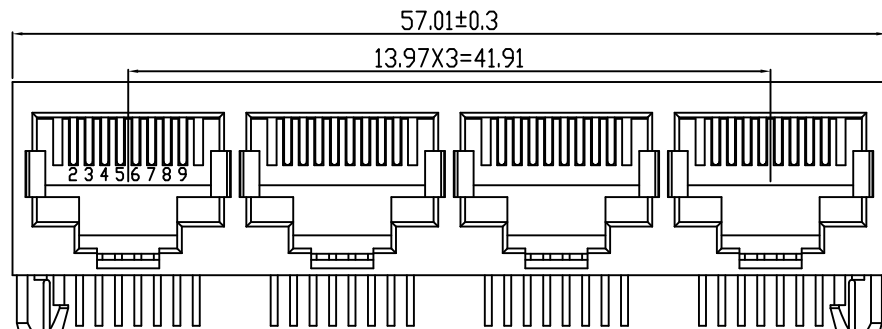

PC Board Layout

NOTES:

ELECTRICAL:


1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: DIAMETER 0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE: 2.2KG.F MAX.
4. RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40℃ ~ +85℃ RELATIVE HUMIDITY<70%.
2. OPERATION: -40℃ ~ +85℃.

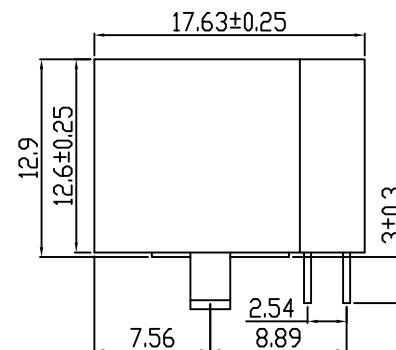

P/N:RJ56A-1814-0000111

5621 RJ45 90° DIP SERIES PCB JACK
POSITIONS(金針位置):
1-10POSITIONS(10P)
CONTACTS(金針根數):
8-8CONTACTS(8C)
PORTS(端口):
1-1-14
SHIELD(屏蔽壳):
0-Without SHIELD(无屏蔽壳)
PEG/TAB(边定位位脚):
0-Without PEG (无定位脚)
BACK PEG(后背定位脚):
0-Without BACK PEG(无后背脚)

COLOR(颜色):
1-BLACK(黑色)
4-YELLOW(黄色)
PLASTIC(塑料):
1-PPBT;2-PA66
3-PA46
GOLD PLATING(镀金厚度):
1-10";5-60";6-150"
7-500";8-500";
EMI(EMI弹片):
0-Without EMI(无弹片)
1-With EMI(有弹片)

					GENERAL TOLERANCE		DRAWN	Geme Li	2016/12/11	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD	
					.X ±0.35	X.° ±2°	CHECKE	JB			
					.XX ±0.25	.X° ±1°	APPROVE			PART NO.	RJ56A-1812-0000111
					.XXX ±0.15	.XX° ±0.5°				TITLE:	5621 1X2 10P8C
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		UNIT: mm	SCALE: 1:1	SHEET: 1/1	REV: A0	