
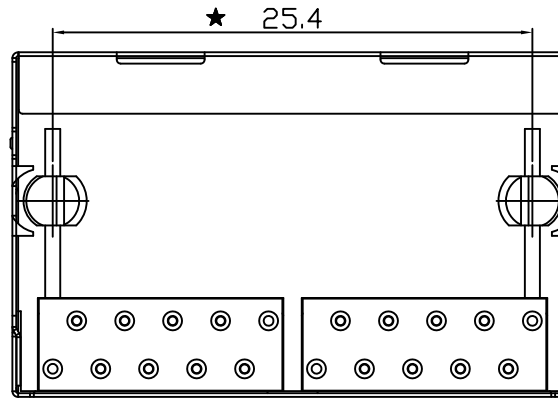


RoHS compliant

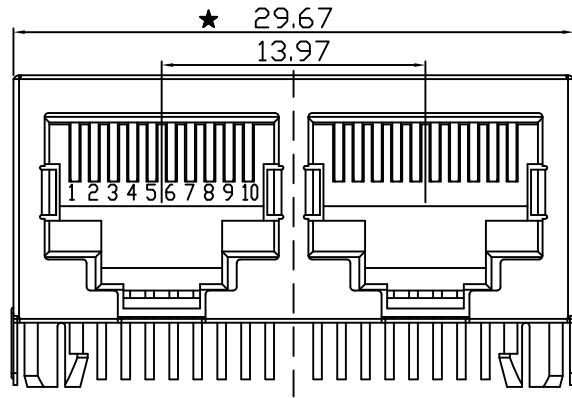

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: DIAMETER 0.46mm C51000(QSn4-0.3)PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
4. MATING/UNMATING FORCE: 2.2KG.F MAX.
5. RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40℃ ~ +85℃ RELATIVE HUMIDITY<70%.
2. OPERATION: -40℃ ~ +85℃.


Remark:

- 1.The mark with★ is the key inspection dimension for QC.


P/N: RJ56A-1112-1100111

5621 RJ45 90° DIP SERIES PCB JACK
POSITIONS (金针位置):
1-10 POSITIONS (10P)
CONTACTS (金针数量):
1-10 CONTACTS (10C)
PORTS (端口):
1-1P; 2-2P; 4-4P
SHIELD (屏蔽壳):
1-FULL SHIELD (全包)
PEG/TAB (边定位脚):
1-FRONT PEG 3.05 (脚前3.05)
BACK PEG (后肯定位脚):
0-Without BACK PEG (无后背脚)

COLOR (颜色):
2-BLACK (黑色)
4-YELLOW (黄色)
PLASTIC (塑料):
1-PCBT; 2-PA66
3-PA46
GOLD PLATING (镀金厚度):
1-10" 5-50" 10-50"
7-300" 8-500"
EMI (EMI薄片):
0-Without EMI (无薄片)
1-With EMI (有薄片)

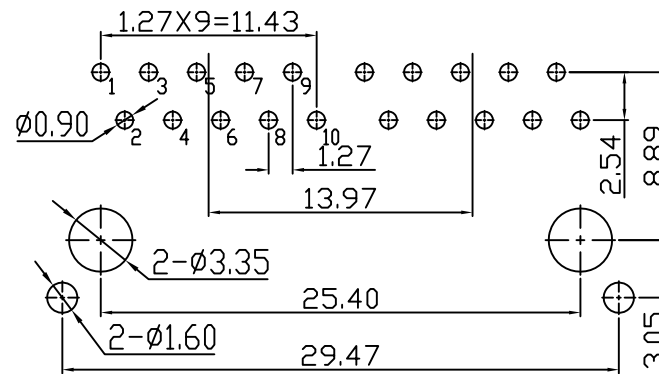

PC Board Layout

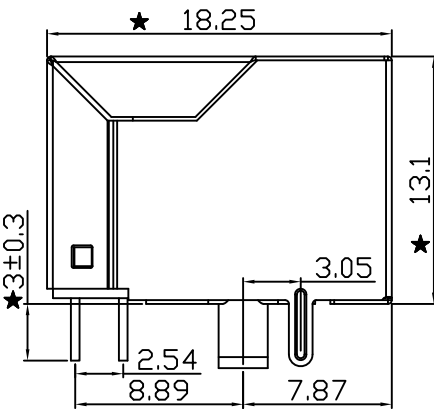

					GENERAL TOLERANCE		DRAWN		Gene Li		2016/12/11		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD				
					.X	±0.35	X.°	± 2°	CHECKE		JL						
A0		NEW DESIGN		2016/12/11		.XX	±0.25	X.°	± 1°	APPROVE				PART NO.		RJ56A-1112-1100111	
						.XXX	±0.15	.XX°	± 0.5°								
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT		UNIT: mm		SCALE: 1:1	SHEET: 1/1	REV: A0	TITLE:		5621S 1X2 10P10C F3.05(无后背脚)		