
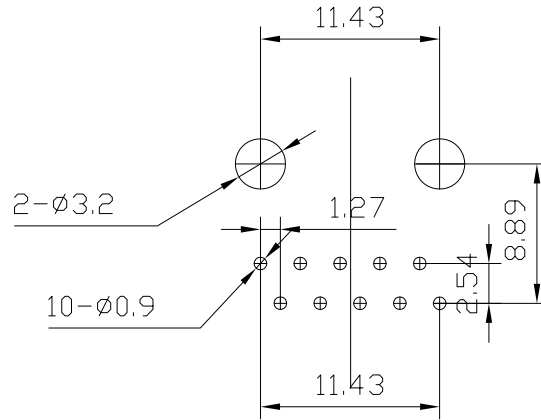
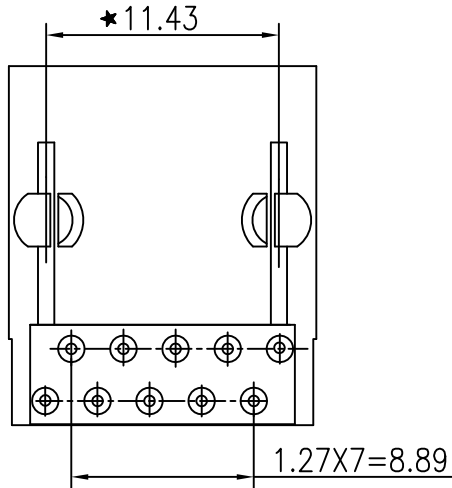
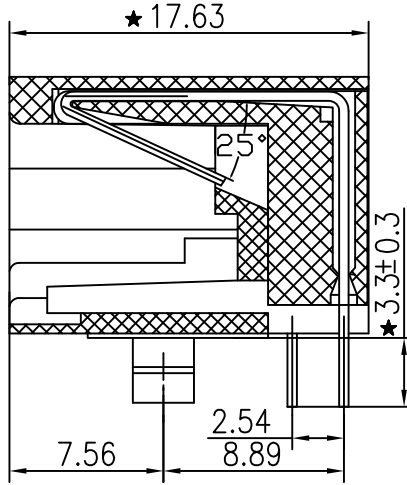


RoHS compliant

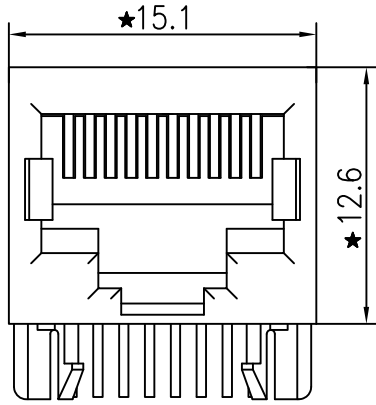

PC Board Layout

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

- HOUSING & INSERT MATERIAL : PBT UL94V-0.
- CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE
GOLD PLATING OVER NICKEL.
- MATING/UNMATING FORCE : 2.2KG. F MAX.
- RETENTION STRENGTH : 7.7KG. F MIN BETWEEN JACK AND PLUG.
- OPERATING LIFE : 600 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE : -10°C ~ +40°C RELATIVE HUMIDITY<70%.
- OPERATION : -40°C ~ +85°C.

Remark:

1. Tolerances Unless Otherwise Specified

.0±0.25 .00±0.20 .000±0.10

2. The mark with is the key inspection dimension for QC

P/N:RJ56A-1111-0000111

5621 RJ45 90° DIP SERIES PCB JACK

POSITIONS (金針位置)

1-10POSITIONS (10P)

CONTACTS (金針根數)

10-10CONTACTS (10C)

PORTS (窗口)

11-1X1

SHIELD (屏蔽壳)

0-Without SHIELD (无屏蔽壳)

PCB (无边位脚)

0-Without PCB (无边位脚)

BACK PCB (后肯定位脚)

0-Without BACK PCB (无后肯定位脚)

COLOR (颜色):

1-BLACK (黑色)

4-YELLOW (黄色)

PLASTIC (塑料):

1-PBT; 2-PA66

3-PA46

GOLD PLATING (鍍金厚度):

1-10"; 5-60"; 6-150"

7-300"; 8-500"

EMI (EMI弹片)

0-Without EMI (无弹片)

1-With EMI (有弹片)

GENERAL TOLERANCE

.X ±0.35 X.° ±2°

.XX ±0.25 X.° ±1°

.XXX ±0.15 .XX° ±0.5°

PROJECT

DRAWN

Gene Li

2016/12/11

CHECKE

JB

APPROVE

UNIT: mm

SCALE: 1:1

SHEET: 1/1

REV: A0

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

PART NO.

RJ56A-1111-0000111

TITLE:

5621 1X1 10P10C

PROJECT