
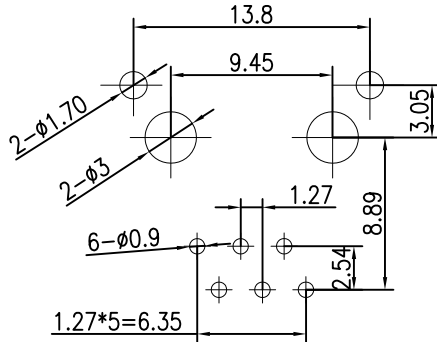
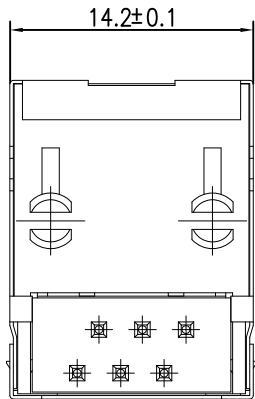
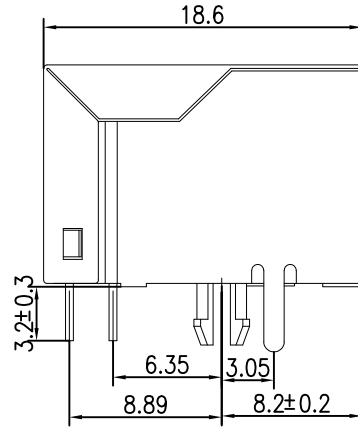


RoHS compliant

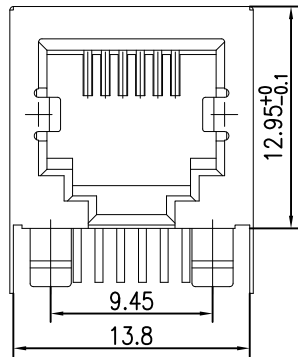

PC Board Layout

NOTES

MATERIAL

1. HOUSING MATERIAL : PBT BLACK UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
: FU", 3U", 6U", 15U", 30", 50".
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY
WITH NICKEL PLATED.

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. OPERATION : $-40^{\circ}\text{C TO } 85^{\circ}\text{C}$.

P/N:RJ56A-6611-1100111

5621 RJ45 90° DIP SERIES PCB JACK
POSITIONS (金針位置):
6-POSITIONS (6P)
CONTACTS (金針根數):
6-CONTACTS (6C)
PORTS (端口):
11-1X1
SHIELD (屏蔽壳):
1-FULL SHIELD (全包)
PEG/TAB (固定位脚):
1-FRONT PEG 3.05 (腳前3.05)
BACK PEG (后背定位脚):
0-Without BACK PEG (无后背脚)

COLOR (顏色):
1-BLACK (黑色)
4-YELLOW (黃色)
PLASTIC (塑料):
1-PBT; 2-PM66
3-PA46
GOLD PLATING (鍍金厚度):
1-1U" 3-6U"; 6-15U"
7-30U" 30-50U";
EMI (EMI薄片):
0-Without EMI (无薄片)
1-With EMI (有薄片)

					GENERAL TOLERANCE		DRAWN	Geme Li	2016/12/11	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD	
					.X	±0.35	X.°	± 2°	CHECKE		
					.XX	±0.25	.X°	± 1°	APPROVE	PART NO.	RJ56A-6611-0000111
					.XXX	±0.15	.XX°	± 0.5°		TITLE:	5621S 1X1 6P6C F3.05
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		UNIT: mm	SCALE: 1:1	SHEET: 1/1	REV: A0	